



Company name	WOSPerformance
Reference number	
Part	LMA534
Manufacturer	WOSP
Nominal current [A]	175A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	98 A	
Maximum output power	2064 W	
Max output current	160 A	
Ripple	6 A	
Leakage	<5mA	
Maximum efficiency	50 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1681 rpm	
Motor power	4.1 kW	
Torque	10.5 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	15.2 V	
VSP @4,250	15.1 V	
VSP @6,000	15.1 V	
Duration of the procedure	41.5 s	
Three-phase voltage	416.1 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	B+B-	

**Activity chart**

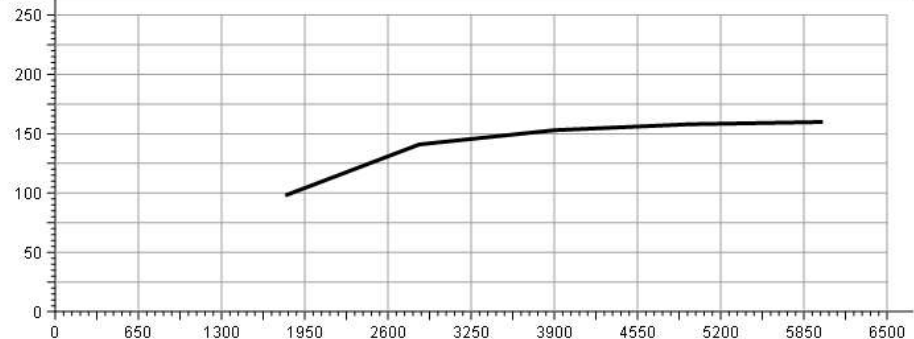

**Data**

[RPM]	Current [A]	Reference [A]
5997	160	
4950	158	
3900	153	
2844	141	
1797	98	