



Company name	WOSPerformance
Reference number	
Part	LMA556
Manufacturer	WOSP
Nominal current [A]	95A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	51 A	
Maximum output power	1203 W	
Max output current	94 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	36 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1284 rpm	
Motor power	3.3 kW	
Torque	8 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	299 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	45.2 s	
Three-phase voltage	405 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

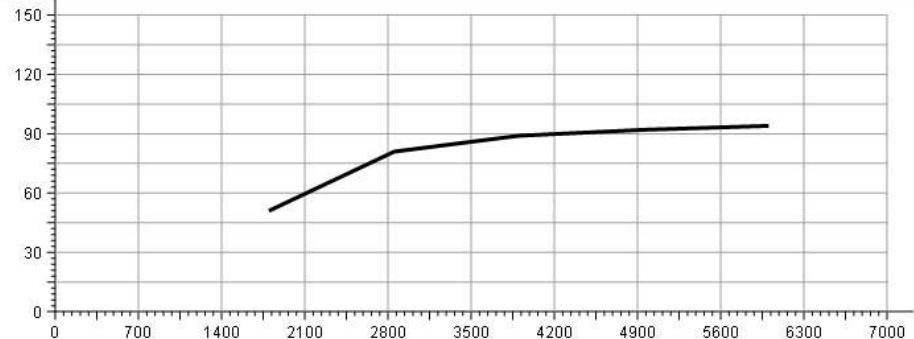

Data

[RPM]	Current [A]	Reference [A]
6003	94	
4949	92	
3899	89	
2854	81	
1797	51	