



Company name	
Reference number	
Part	LMA562
Manufacturer	WOSP
Nominal current [A]	95A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	55 A	
Maximum output power	1333 W	
Max output current	98 A	
Ripple	4 A	
Leakage	0	
Maximum efficiency	40 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1298 rpm	
Motor power	3.3 kW	
Torque	8.4 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	292 rpm	
VSP @2,500	14.8 V	
VSP @4,250	14.8 V	
VSP @6,000	14.8 V	
Duration of the procedure	49.3 s	
Three-phase voltage	417.3 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

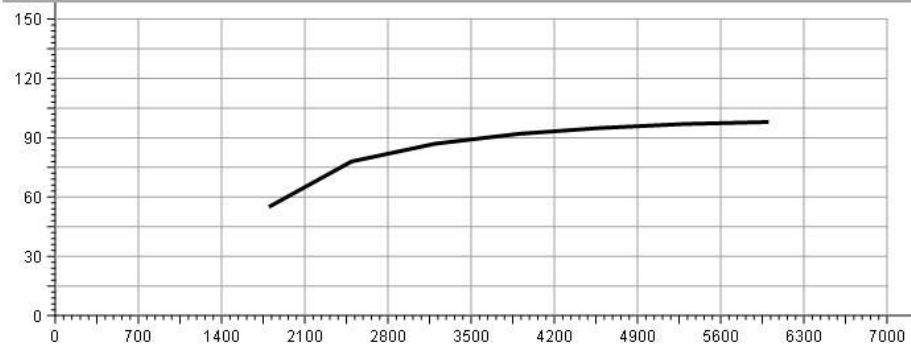

Data

[RPM]	Current [A]	Reference [A]
6003	98	
5298	97	
4597	95	
3905	92	
3197	87	
2492	78	
1797	55	

ADDRESS	WEB	E-MAIL	PHONE