

Company name	
Reference number	
Part	LMA572
Manufacturer	WOSP
Nominal current [A]	175

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	107 A	106 A
Maximum output power	2372 W	2385 W
Max output current	177 A	178 A
Ripple	3 A	5 A
Leakage	0	<5mA
Maximum efficiency	48 %	43 %
Initial voltage	13.4 V	13.2 V
Direction	CW	CW
Turn on speed	1026 rpm	1042 rpm
Motor power	4.9 kW	6 kW
Torque	13.2 Nm	14Nm
Rated voltage	12 V	12 V
Output Voltage Tested	13.6 V	13.6 V
Number of reached levels	5	5
Charge lamp voltage	0.1 V	0.1 V
Status light RPM	297 rpm	303 rpm
VSP @2,500	14.6 V	14.7 V
VSP @4,250	14.6 V	14.7 V
VSP @6,000	14.6 V	14.7 V
Duration of the procedure	40.1 s	42.8 s
Three-phase voltage	413.4 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	Lamp

Activity chart

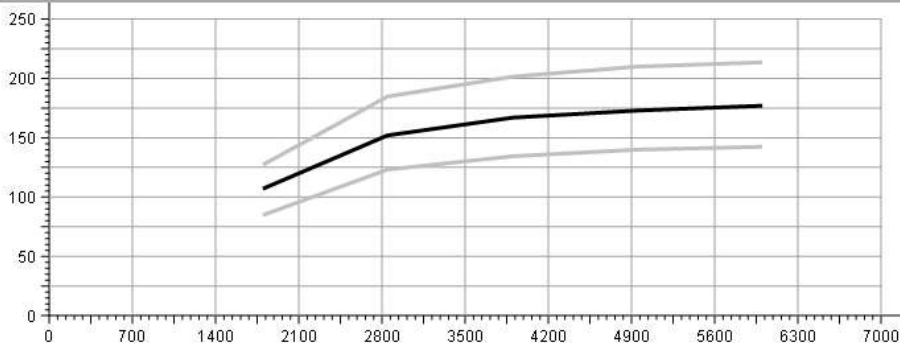

Data

[RPM]	Current [A]	Reference [A]
6000	177	178
4952	173	175
3900	167	168
2845	152	154
1797	107	106

ADDRESS

WEB

E-MAIL

PHONE