



Company name	WOSPerformance
Reference number	
Part	LMA613
Manufacturer	WOSP
Nominal current [A]	95A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	54 A	
Maximum output power	1242 W	
Max output current	97 A	
Ripple	4 A	
Leakage	<5mA	
Maximum efficiency	40 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1280 rpm	
Motor power	3.1 kW	
Torque	8.5 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	293 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	45.1 s	
Three-phase voltage	408.4 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	

**Activity chart**

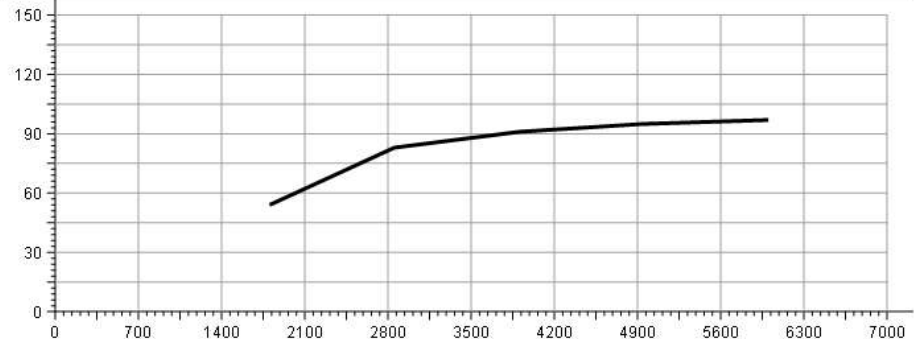

**Data**

[RPM]	Current [A]	Reference [A]
6000	97	
4950	95	
3907	91	
2853	83	
1803	54	