



Company name	
Reference number	
Part	LMA648-LO
Manufacturer	WOSP
Nominal current [A]	120


Test results table

Parameter	Value	Reference
Output at low revolutions	86 A	
Maximum output power	1891 W	
Max output current	138 A	
Ripple	5 A	
Leakage	0	
Maximum efficiency	46 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	1071 rpm	
Motor power	4.1 kW	
Torque	10.6 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	295 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	40.7 s	
Three-phase voltage	407.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

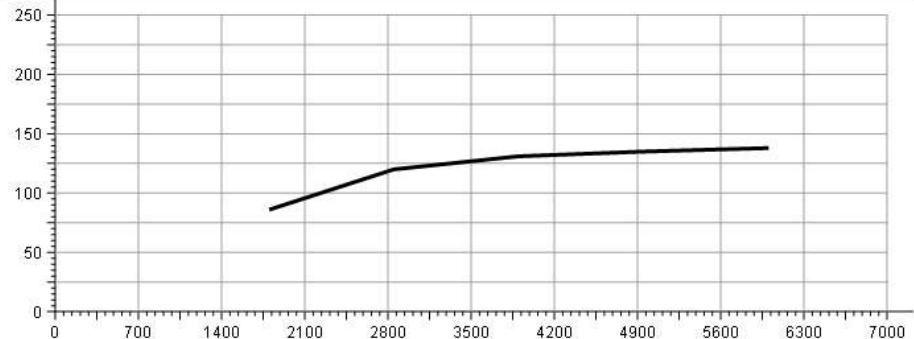

Data

[RPM]	Current [A]	Reference [A]
6003	138	
4942	135	
3898	131	
2849	120	
1800	86	

ADDRESS	WEB	E-MAIL	PHONE