

Company name	WOSPerformance
Reference number	
Part	LMDMB300-RD
Manufacturer	WOSP
Nominal current [A]	50A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	12 A	
Maximum output power	718 W	
Max output current	52 A	
Ripple	1 A	
Leakage	0	
Maximum efficiency	27 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1413 rpm	
Motor power	2.7 kW	
Torque	4.5 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.9 V	
Status light RPM	294 rpm	
VSP @2,500	15.1 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	49.5 s	
Three-phase voltage	415.6 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

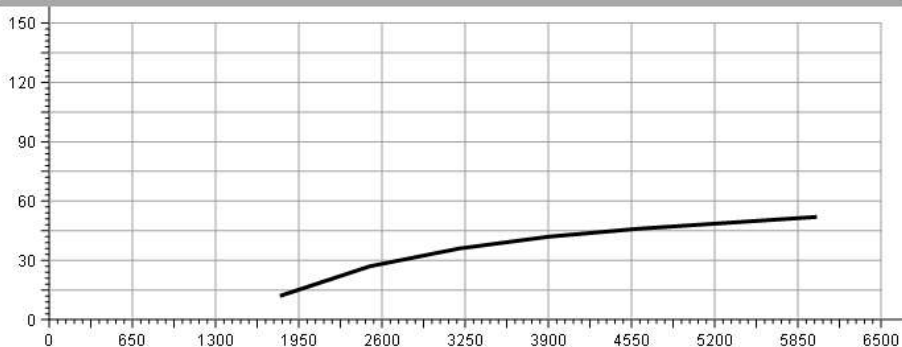

Data

[RPM]	Current [A]	Reference [A]
5998	52	
5302	49	
4602	46	
3902	42	
3202	36	
2504	27	
1802	12	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com